

CO



AEROFLEX

Aerodynamic and Flexible Trucks for Next Generation of Long Distance Road Transport

**EUROPEAN COMMISSION
Horizon 2020 | GV-09-2017 | Aerodynamic and Flexible Trucks
GA - 769658**

Deliverable No.	AEROFLEX D3.3	
Deliverable Title	Recommendations for the demonstrator	
Deliverable Date	2020/03/30	
Deliverable Type	REPORT	
Dissemination level	CO	
Written By	Kamran Noghabai (SCANIA)	
Checked by	Per Elofsson (SCANIA) Hilal van der Holst (WABCO) Magnus Olbäck (VOLVO) Ton Bertens (Van Eck Trailers)	2020/03/17
Approved by	Ben Kraaijenhagen - Coordinator	2020/03/25
Status	FINAL	2002/03/26

Document information

Additional author(s) and contributing partners

Name	Organisation
Roy Veldhuizen	WABCO
Per Elofsson	SCANIA

Publishable Executive Summary

This document is Deliverable D3.3 of the AEROFLEX project. It describes the basis for selection of the components and technologies for implementation on the EMS 25.25m demonstrator vehicle, in order to improve its aerodynamic performance. The investigated concepts were selected and combined from those identified as promising and presented in D3.1 (ref [1]), and further developed, using the CFD Baseline EMS25.25 model¹ in D3.2 (ref [2]). The study also aims to demonstrate how well the predicted improvements achieved with the Optimised EMS25.25 model² are translated to the more realistic demonstrator vehicle and to verify the potential of the proposed recommendations for fulfilment of the KPI specified for the vehicle in ref [3], namely 15% drag reduction compared to the Reference EMS1.

Three different setups, including different number of concepts with different level of complexity, were simulated in order to understand how the level of improvement varies when selecting different concepts in combination, and to find suitable setup to implement on the real demonstrator in order to fulfil the target KPI. The different combinations are briefly described in Figure 1-1 below.

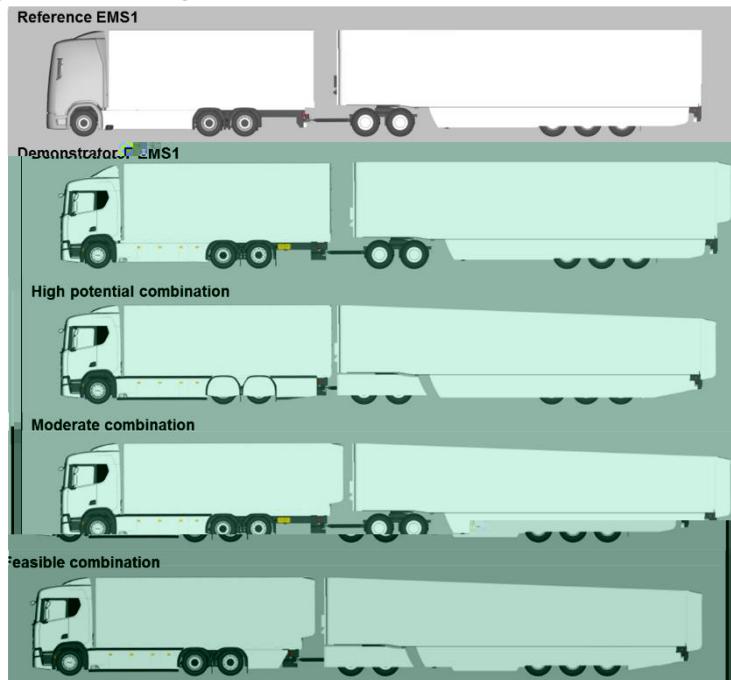


Figure 1-1: Reference EMS1 model and the demonstrator model with different concept combinations

Concepts concerning active air deflector and boat-tail were not considered to be part of the combinations, since they already are included in the model as static representations, in a position (more or less) optimised for the configuration considered.

The simulated combinations were compared with the Reference EMS1 model, for KPI assessment. Additionally, a realistic SCANIA Demonstrator EMS1³, equipped with a Boat tail but otherwise as the Reference model, was used to better illustrate and quantify the benefit of the selected concepts. The resulting $\Delta C_D \times A$ values, for a crosswind angle of 5° are presented in the Table 1-1 below.

Table 1-1: $\Delta C_D \times A$ for the Demonstrator with different combinations of improvements applied, compared to reference models

	$\Delta C_D \times A @ \text{yaw } -5^\circ$					
	<i>High potential</i>		<i>Moderate combination</i>		<i>Feasible combination</i>	
	[m2]	[%]	[m2]	[%]	[m2]	[%]
Vs. Reference EMS1	-2.07	35.4	-1.58	27.0	-1.87	32.0
Vs. Demonstrator EMS1	-1.48	28.1	-0.98	18.7	-1.28	24.4

¹ The CFD Baseline model is a generic truck model, with extended front, representing the 2022 standard and equipped with what is considered as state-of-the-art today (ref [1])

² The Optimised EMS25.25 model is the optimised version of the CFD Baseline model, developed in Task 3.2 (ref [1])

³ The Demonstrator EMS1 model is the base model with the realistic SCANIA truck, on which the different improvement concepts are applied and simulated

The result summary in Table 1-1 shows that all the different combinations presented here fulfil the required KPI for the Demonstrator EMS 25.25m with broad margin, which indicates that the KPI will most likely be realised when such combinations are applied on the real demonstrator. Based on the results, and the complexity of the concepts involved, the *Feasible combination* (Figure 1-2) is therefore recommended as suitable modification package to be applied on the test vehicle.

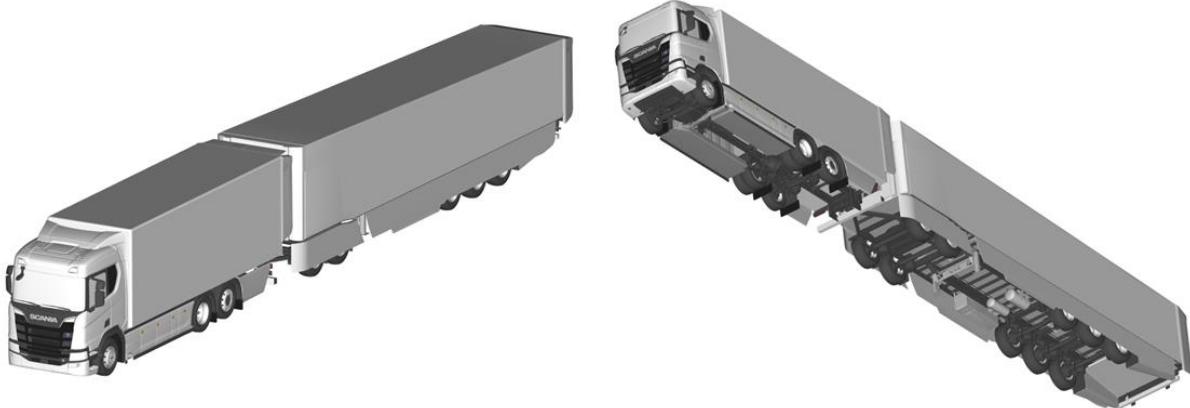


Figure 1-2: Recommended concepts for implementation on the demonstrator EMS 25.25m vehicle

The recommended combination consists of the following concepts:

1. Upper and lower side skirt extensions on truck
2. Adaptable body work height (-250mm)
3. Adaptable trailer shape (-300 to 800mm)
4. Underbody panels, covered fuel tanks
5. Rear side skirt on truck
6. Standard gap + 0° boat-tail on truck
7. Dolly side skirt
8. Short skirt extension on trailer
9. Trailer end underbody diffuser

In addition to the features listed above, the following active measures are recommended to be included on the test vehicle:

9. Adjustable roof air deflector
10. Boat tail with adaptable panels
11. Active ride height

1 Acknowledgement

The author(s) would like to thank the partners in the project for their valuable comments on previous drafts and for performing the review.

Project partners:

#	Partner	Partner Full Name
1	MAN	
4	SCANIA	
5	VOLVO	
9	VET	
13	WABCO	



This project has received funding from the European Union's Horizon2020 research and innovation programme under Grant Agreement no. **769658**.

Disclaimer

This document reflects the views of the author(s) and does not necessarily reflect the views or policy of the European Commission. Whilst efforts have been made to ensure the accuracy and completeness of this document, the AEROFLEX consortium shall not be liable for any errors or omissions, however caused.