

Progress towards Federated Logistics through the Integration of TEN-T into A Global Trade Network

k i ajpO i i nu ĩ bkri p&j

	860274		PLANET
	<u>Progress towards Federated Logistics through the Integration of TEN-T into A Global Trade Network</u>		
	01/06/2020		36 months
	www.planetproject.eu		
	D1.10 EGTN Reference Specification v1		
	1		
	30/09/2021 [M16]		30/09/2021
	Report		Public
	CERTH		
	Georgia Ayfantopoulou CERTH (gea@certh.gr) Orestis Tsolakis CERTH (ortsolakis@certh.gr)		
	Alberto Giudici EUR RSM (giudici@rsm.nl) Chris Wensink, Ivo Hindriks PANTEIA (C.Wensink@panteia.nl , i.hindriks@panteia.nl) David Cipres ITAINNOVA (dcipres@itainnova.es) Eric Feyen UIRR (efeyen@uirr.com) Kostas Zavitsas VLTN (k.zavitsas@vltm.be) Maurice Jansen EUR UPT (m.jansen@ese.eur.nl) Takis Katsoulakos INLECOM (takis.katsoulakos@inlecomsystems.com)		



Revision history (including peer reviewing & quality control)

v0.1	25/6/2021	10%	Initial Deliverable Structure & alignment to DoW	CERTH
v0.2	24/8/2021	20%	Added description of EGTN network model, prerequisites for PI implementation & form of governance model	ITAINNOVA
v0.3	24/8/2021	25%	Added draft description of the EGTN vision	EUR UPT
v0.4	31/8/2021	30%	Added information on the description of EGTN network model	VLTN
v0.5	01/9/2021	40%	Added description of the innovation modelling generalisation method	EUR RSM
v0.6	11/9/2021	60%	Added description of routing decision support models & EGTN network model	VLTN
v0.7	22/9/2021	80%	Added the initial assessment of three trade routes impact to TEN-T & disadvantaged regions for base year and description of the transport gravity models	PANTEIA
v0.8	23/9/2021	85%	Added legislative & policy prerequisites for EGTN development	CERTH
v0.9	28/9/2021	90%	Added PLANET vision & EGTN components definition	INLECOM
v1.0	30/9/2021	100%	Integration of comments from the internal review & quality control	CERTH

Disclaimer

The content of the publication herein is the sole responsibility of the publishers and it does not necessarily represent the views expressed by the European Commission or its services.

While the information contained in the documents is believed to be accurate, the authors(s) or any other participant in the PLANET consortium make no warranty of any kind with regard to this material including, but not limited to the implied warranties of merchantability and fitness for a particular purpose.

Neither the PLANET Consortium nor any of its members, their officers, employees or agents shall be responsible or liable in negligence or otherwise howsoever in respect of any inaccuracy or omission herein.

Without derogating from the generality of the foregoing neither the PLANET Consortium nor any of its members, their officers, employees or agents shall be liable for any direct or indirect or consequential loss or damage caused by or arising from any information advice or inaccuracy or omission herein.

Copyright message

© PLANET Consortium, 2020-2023. This deliverable contains original unpublished work except where clearly indicated otherwise. Acknowledgement of previously published material and of the work of others has been made through appropriate citation, quotation or both. Reproduction is authorised provided the source is acknowledged.

P h a k b k j p a j p o

H e p k b B e m a o

B e m a 2 a p s k n g i k a h o p n p n a b k n p d a P A P o a L E j a p s k n g

B e m a 3 N e h j s p a n p n j d k r p j a p s k n g o k b p d a L E j a p s k n g o a k j P A P

- Bæ na 4 N ds u j s panpani e t
- Bæ na 5 Lkrpkb j ps arl nal naaj p p k j o LED
- Bæ na Haralokbl duoe h e panj apckranj j a

HepkbP lao

Glossary of terms and abbreviations used

ALICE	Alliance for Logistics Innovation through Collaboration in Europe
DTLF	Digital Transport and Logistics Forum
DSS	Decision Support System
	Green EU-Global Trade & Logistics Networks
EU	European Union
GA	Grand Agreement
ICT	Information and Communications Technology
IDSA	International Data Spaces Association
ISP	Internet service provider
LL	Living Labs
MAMCA	Multi-Actor, Multi-Criteria Analysis
NUTS	Nomenclature of territorial units for statistics
OR	Operational Research
PI	Physical Internet
TCP	Transmission Control Protocol
	Trans-European Transport Network
TEU	Twenty-foot Equivalent Unit
WP	Work Package

The present deliverable builds on the results of the work undertaken in WP1 tasks in order to provide the initial specifications for defining the Green EU-Global Transport & Logistics Network (EGTN). The EGTN aims to become the realization of the EU Commission vision for Smart, Green and Integrated Transport and Logistics by efficiently interconnecting infrastructure (TEN-T, Rail-Freight Corridors) with geopolitical developments, as well as optimising the use of current & emerging transport modes and technological solutions, while ensuring equitable inclusivity of all T&L participants, increasing the prosperity of nations, preserving the environment, and enhancing Citizens quality of life.

EGTN consists of three interactive layers, the physical, the technological and the governance layer, the specifications of which are defined in the present and the last version (D1.11) of this document. The physical layer includes the physical infrastructure of the network in terms of revised/new TEN-T corridors and nodes while the technological layer includes the required digital infrastructure in order for the network to leverage innovative technologies and concepts and operate under a Physical Internet paradigm. The governance layer includes the proper governance form that will ensure that the EGTN members engage in collective and mutually supportive action, that conflict is addressed, and that network resources are used efficiently and effectively.

With respect to the physical layer of the EGTN, the initial results from the establishment of the base year scenario (2019) for the impact of the three new trade routes (Eurasian land bridge, Arctic route and International North-South corridor) on the TEN-T network showed that the intercontinental rail freight connections between China, Russia and Europe (belonging to the Belt and Road Initiative) and more specifically the

appears to be the most mature route and the only one that will be of significant importance in the near future. The main entry most important start and end point for trains to and from China is the inland port of Duisburg. As for the main identified bottlenecks that hinder and

most important one mainly due to time-consuming custom procedures, followed by the congestion phenomena of the European rail network. The International North-South trade corridor (INSTC) has the potential for serving significant cargo loads but its implementation time horizon is uncertain and also it will be more interesting as a European trade route if European trade can be combined on INSTC trains with Russian cargo. Finally, the freight flows through the Arctic route are not expected to increase significantly, thus keeping the impact on the European TEN-T network negligible.

Regarding the governance model of the EGTN, it appears that a bottom-up approach is the only viable strategy for a more progressive growth of the PI network. According to this approach, different stakeholders will agree among themselves to develop parts of the PI while a central body will be needed to establish common standards for the PI in order to bring these parts together. Moreover, the governance framework will need to support collaboration and asset sharing in horizontally integrated supply networks and also the removal of boundaries between vertically integrated supply chains to allow asset sharing and opportunistic routing and re-planning of shipments across PI nodes belonging to different networks. The legislative and policy initiatives which are prerequisites for the development of the EGTN, including mainly initiatives towards the achievement of interoperability, the greening of investments and the digitalisation of transportation, are also presented.

Finally, the technological layer of the EGTN will be the backbone of the network, supporting and connecting all of its aspects, namely the planning of its development, its governance and its operationalisation, through the implementation of innovative PI enabling technologies and logistics concepts. This will be achieved through the development of a cloud-based Open digital infrastructure that will include proper tools and models but also through a strategic modelling capability which however will be developed outside the Open digital infrastructure.

The purpose of this deliverable is to provide a detailed description of the main components of the vision of the - (EGTN). This description is based on the results of the work performed so far in the context of the WP1 tasks and includes:

The next version of this deliverable will include:

In this (first) version of the document, the approach is made to define the EGTN specifications, considering the WP1 the analysis and bringing together the opinions and considerations of the consortium regarding the definition and components of the EGTN. These specifications will be further defined and finalized in the next (final) version of the document (D1.11), based on the final outcomes of the relevant project tasks.

Purpose of this section is to map PLANET t Agreement commitments, both within the formal

P h a daraj a pk LH AP oC alre an h kP ogo ao nē pakj o

D1.10 EGTN Reference Specification v1	The EGTN vision for 2030; the EGTN physical layer, governance, and technological layer specifications. New models that will support the operationalisation of EGTN, including the corridor connectivity	<p>Chapter 3: Towards the EGTN vision for 2030</p> <p>Chapter 4: EGTN Physical layer specifications</p> <p>Chapter 5: EGTN Technological layer specifications</p>	In the main chapters of the current (first) version of the document, all three types of EGTN specifications (physical, technological and governance) are provided in summary with a brief analysis, building on the work undertaken in WP1 tasks. There are no details included on the new models that will support operationalization of EGTN.

		<p>Chapter 6: EGTN Governance layer specifications</p> <p>Chapter 7: Conclusions</p>	
<p>ST1.5.1 Defining the EGTN vision for 2030</p>	<p>The present sub-task will link the two modelling dimensions (TEN-T & PI) developed in previous tasks (T1.2 & T1.4) in order to enrich the TEN-T modelling with the technological and organisational innovation dimension embedded in the PI modelling and the PI modelling with the geographical & infrastructural dimension provided by the TENT modelling. The results of technological innovation modelling (T.1.4) will be generalised at an EU level and will be fed into a re-iteration of TEN-T modelling undertaken in T.1.2.</p>	<p>Subchapter 3.1: Definition of the EGTN concept</p> <p>Subchapter 3.2: EGTN strategic vision/profile</p> <p>Subchapter 5.3: Generalization of technological innovation modelling</p>	<p>In subchapters 3.1, 3.2 & 3.3 an overview is provided of the PLANET approach towards the definition of the EGTN, its layers, components and main characteristics.</p> <p>In subchapter 5.3 an overview is provided of the methodology which is being developed in order to generalise the results from micro simulation and the LLs regarding the impact of innovative technologies to logistics operations and to feed the macro (strategic) modelling.</p>
<p>ST1.5.2 EGTN physical layer specifications</p>	<p>The present sub-task will record the physical layer specifications that will be defined through the network simulation (T1.2 and ST1.5.1), in the form of new (or of revised significance) corridors & entry points and new (or of revised criticality) capacity bottlenecks on corridors & entry points, as a result of emerging trade</p>	<p>Subchapter 4.1: Introduction</p> <p>Subchapter 4.2: Integration of new trade routes to the TEN-T</p> <p>Subchapter 4.3: Strategic scenarios to be tested for 2030 and 2050</p>	<p>In Subchapter 4.1 an overview is provided of the parameters expected to have an impact on the physical layer structure of the EGTN and the strategic simulation process.</p> <p>In Subchapter 4.2 an initial assessment of the impact of the new trade routes on the TEN-T, based on the results from the base year (2019) simulation.</p> <p>In subchapter 4.3 an overview of the strategic scenarios methodology</p>

	<p>routes in order to ensure that the EGTN fulfils its - attribute. Furthermore, a cross-comparison of the structure with the PLANET LL corridors will be made.</p>		for the 2030 & 2050 simulations is presented
ST1.5.3 EGTN technological layer specifications	<p>The present sub-task will define the technological infrastructure that is required to leverage emerging technologies in order for the EGTN to operate under a PI paradigm and thus fulfil</p> <p>These specifications include: 1) a network model specifying the</p> <p>Transport gravity models which will be used to assess the change in the volume of freight and 3) Routing decision support models based on a new connectivity index. Furthermore, it will define the functions provided by this infrastructure in order to leverage emerging technologies, which will become the requirements for the PLANET Cloud-based Open EGTN Infrastructure.</p>	<p>Subchapter 5.2: Planning and decision support for infrastructure development Subchapter 5.4: Defining the PI subnetwork of EGTN Subchapter 5.5: Operationalisation of the EGTN</p>	<p>In Subchapter 5.2 the requirements from the technological layer are presented in order to support the planning and the decision making (governance level) of the EGTN physical infrastructure. In subchapter 5.4 a brief description of the methodology for defining the PI network model of the EGTN is provided. In subchapter 5.5 the requirements from the technological layer are presented in order to support the operationalisation of EGTN including a brief description of the routing decision support models.</p>
ST1.5.4 EGTN governance layer specifications	<p>The present sub-task will define the specifications towards the development of a goal-directed form of</p>	<p>Subchapter 6.2: TEN-T governance structure</p>	<p>In Subchapter 6.2 the current governance structure of the TEN-T is presented. In Subchapter 6.3 the possible alternative governance structures</p>

	<p>network governance which will ensure that the EGTN members engage in collective and mutually supportive action, that conflict is addressed, and that network resources are used efficiently and effectively, while taking into account the existing TEN-T governance structure. This will be achieved by addressing:</p> <ul style="list-style-type: none"> i) the breadth of decisions to be made by the EGTN members; ii) the competencies required to achieve the EGTN goals; iii) the EGTN governing entity & responsibilities/tasks allocation to network members; and iv) the EGTN evolution & expansion. 	<p>Subchapter 6.3: Shaping EGTN governance</p>	<p>for the EGTN are presented together with an initial assessment of the legislative and policy initiatives required for the EGTN development.</p>
--	--	---	--

The present document is structured in 7 chapters, providing an initial view of the reference specifications of the EGTN, building on the results of the work undertaken in WP1 tasks and was consolidated under the final WP1 task, task 1.5.

Starting from chapter 3, an initial definition of the EGTN is provided and the strategic vision for the EGTN is described as a network that will bundle together geo-economics awareness and innovation embeddedness in order to better serve freight flows and facilitate the realisation of EU strategies regarding environmental protection, the economic development of EU, equity, human development and others. In the final version of the document, the final definition of the EGTN will be provided, together with a specific set of indicators that will be used for monitoring and assessing its performance at the strategic level. Furthermore, based on these final results of the work undertaken in the other WP1 tasks, an answer to the question about whether investments in technology can substitute infrastructure investments will be given.

In chapter 4, the results from the initial simulation of EU transportation network is presented for the base year (2019) with the integration of the main global corridors. Based on the impact on current freight flows and bottlenecks from the integration of the new trade routes, some initial considerations and

leveraging of innovative technologies and logistics concepts. This will provide an overview of the expected physical structure of the future European transportation network and will facilitate the prioritisation of nodes and corridors for developing a PI network.

In chapter 5, an initial approach is provided on the technological requirements and specifications of the EGTN in order to be able to take advantage of innovative logistics concepts and technological innovations and operate under the PI paradigm. In this context, the method for specifying the EGTN network design (in terms of PI corridors and nodes) together with the transport gravity models and routing decision support models which will be developed in the project, are briefly described. Moreover, a first approach on the requirements from the PLANET Cloud-based Open EGTN Infrastructure is provided in order for EGTN to be able to leverage emerging technologies and to support all aspects of the EGTN, namely the planning of infrastructure development, the management of operations and its governance. In the final version of the document, the specific details will be provided for the network model, the transport gravity model and the routing decision support model which will be part of the EGTN solution, supporting its operationalisation. Furthermore, the specific tools and services provided by the PLANET Cloud-based Open EGTN Infrastructure will be described based on the final results of the work of WP2. In chapter 6 the issue of the governance specifications of the EGTN is tackled, providing information about the current TEN-T governance scheme and presenting the possible alternatives for network governance under the principals of the PI paradigm based on the ALICE roadmap to the PI. Moreover, the governance loop (planning regulating facilitating monitoring re-planning) is discussed including an initial assessment of the prerequisites at legislation/policy level for EGTN realisation. In the second version of the document, a specific model of governance will be proposed including details regarding the required competencies to achieve EGTN goals, the form of the governing entity, the responsibilities/ allocation of tasks to the EGTN members and the breadth of decisions for each member and finally the provisions for the EGTN evolution and expansion. Furthermore, specific proposals regarding the EU legislation and policy towards the realisation of EGTN will be presented.

In the final chapter of the document, the initial conclusions that emerge from the consolidation of the result from the work that has been performed so far in the context of WP1 are presented.

With respect to the linkage of this deliverable to other project outputs and deliverables, the present document is based on the outcomes of all other WP1 deliverables, consolidating their results in order to provide an initial definition of the EGTN specifications. In this context, it is closely linked to all other WP1 deliverables which are the source of the knowledge included to the current document. Moreover, the outputs of this document regarding the technological layer specification will provide guidance to WP2 tasks for defining the architecture of an open ICT infrastructure, feeding the D2.1/D.2.2 - Open EGTN Platform Architecture (v1/final version) and for the development of Transport Gravity Models and Transport Corridor and Network Data Models feeding D2.7/D2.8 - EGTN Transport Data and Knowledge Models (v1/final version). Finally, the governance layer specifications will be fed into the commercialisation strategy (task 5.3) and to the corresponding deliverable D5.6 - Business & Commercialisation plan.

can be understood as an advanced European strategy that implies the development of a Smart, Green and Integrated Transport and Logistics Network of the future to efficiently interconnecting infrastructure (TEN-T, Rail-Freight Corridors) with geopolitical developments, as well as to optimize the use of current & emerging transport modes and technological solutions, while ensuring equitable inclusivity of all T&L participants, increasing the prosperity of nations, preserving the environment, and enhancing Citizens quality of life. The strategy definition, the support to strategy implementation, the strategy possible outcomes (digital & physical infrastructures, new operational methods etc.) and the monitoring and maximization of strategy impact are functional components of the EGTN concept.

Elaborating further on the EGTN concept, it can be defined as a green, globally connected and smart network that will be aware of the global and EU geo-economic developments and take advantage of technological advancements, timely responding to changes by adapting its development and operation. It will be an optimisation ready network in terms of logistics operations, able to better respond to the industry needs through the implementation of innovative technologies under the Physical internet concept. At the same time, it will be an open network in terms of information sharing by its stakeholders, supporting their decision making at every level (operational, strategic etc) and including them to its governance scheme through a multi-level governance approach. Finally, its structure will ensure that the disadvantaged regions of EU will have the required level of connectivity.

In this context, PLANET defines the **Attributes of the future EGTN** as following:

- **Geo-economics aware:**
- **Innovation:**
- **Impact:**
- **Integrated:**
- **Inclusive:**


This definition and attributes are aligned to the PLANET involved stakeholders view, who by priority defined EGTN as:

- The TEN-T of the future in terms of T&L infrastructure (a revised TEN-T rail/road/maritime infrastructure, ports & terminals), connected & operationally integrated to the global corridors.
- An ecosystem of stakeholders from the logistics industry collaborating for sharing transport & logistics infrastructure
- A cloud platform offering connectivity and tools for enhancing logistics operations
- A Platform collecting data and supporting the planning for the future of TEN-T development
- The PI infrastructure and the associated innovative, disrupting technologies been implemented along selected TEN-T corridors and Gate terminals

To satisfy the above attributes PLANET goes beyond strategic transport studies and also beyond transport ICT research, by rigorously modelling, analysing and assessing T&L interactions and dynamics. The aim is to generate and exercise the most important future scenarios from a T&L perspective. The EGTN

technology workstream is not aimed at producing a 'platform' but instead focuses in a blueprint and best practices to help T&L actors to define and implement a clear digital strategy.

The technical EGTN dimension comprises of the merging of the project's two main research and development streams: 1) modelling and simulation leading to increased understanding and design of EGTN, and 2) provision of an ICT infrastructure that can be used for implementing EGTN solutions.

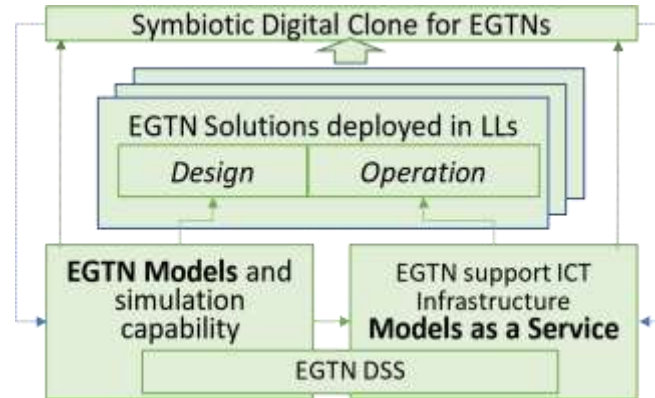

Bæ ra Pda pa dj e h kj al p k b p d a ACP

The EGTN network modelling capability includes models for designing of EGTN solutions and inter-organisational process models associated with synchromodality and PI, the latter

developed as part of the simulation capability but are also used as a component of the ICT infrastructure were interaction with other components is used for automated decisions. The EGTN models will be delivered as a Symbiotic Digital Clone and the developed solutions will be deployed in EGTNs. EGTNs were predicted and actual performance is monitored, and feedback loops are used to constantly refine and update the models (figure 1). The digital clone will provide a collaborative planning tool for all relevant stakeholders that will facilitate: (a) Governments to create policy in advance and (b) companies to create business strategies and technology.

In order to fulfil its purpose, the EGTN concept is structured in the form of three interactive layers: the infrastructural, the technological and the governance layer. For each one of these layers their specifications need to be defined for EGTN to be realized.

The physical layer is the base of the EGTN and will include a dynamic system of terminals, rail, road, waterways and maritime networks, equipment, rolling stock, vehicles, vessels which will physically serve future freight flows and will constitute the network of corridors and nodes of the EGTN. These corridors and nodes are based on the current TEN-T network but revised to include new/of revised significance corridors and nodes, as these are expected to emerge from the integration of the TEN-T corridors to the global network and the flows coming from three emerging trade routes. Moreover, the EGTN development will consider the changes in network structure and flows because of the integration of innovative PI enabling technologies and logistics concepts in its corridors and nodes.

The governance layer deals with the establishment of a governance structure capable to respond to the geo-economic awareness as well as to the need for further integration of the EU member states thereby making sure that peripheral regions are integrated in the economic system of the EU. This also relates to the regulatory harmonization- and interoperability of existing infrastructure and future systems and standards.

Finally, the technological layer is related to the innovation embeddedness of the EGTN and includes the technological infrastructure required to support the operationalization of EGTN under the PI paradigm through providing the proper tools and services that will respond to the EU and industry needs for higher

efficiency of operations. These services will be part of a cloud-based Open EGTN infrastructure which will be developed.

Furthermore, the technological layer will include solutions to support the planning process of the EGTN and also its governance. Regarding the former, it will facilitate infrastructure development planning by providing the strategic modelling and simulation capability for calculating the future freight flows which however will not be included as a service in the Open EGTN infrastructure. As for the EGTN governance, it will provide the tools to foster communication among stakeholders and to support the decision-making processes. Moreover, it will provide the tools for monitoring and calculating all the KPIs which will be used for assessing the EGTN development in operational but also on strategic level.

socially sustainable more economically, environmentally and
design EGTN takes a broader perspective and wants the network to be inclusive by

infrastructure and services **regional logistics** at regional level as an approach that will increase inclusiveness of the disadvantaged regions and support their development. Taking into account the uncertainties related to the scenarios of EGTN (D1.1: EGTN Foundational Position Papers and Simulation Scenarios), regional actor governance and the ability of supporting and planning of new and enhanced operation for better use of infrastructure capabilities and technologies to better serve the demand generated or attracted in a region would be a major specification/characteristic of EGTN. The PLANET Living Labs are examples of the **EGTN regional ecosystems specification**. In the LLs, local and global actors are collaborating for implementing technological solutions which meet ecosystem needs for optimised logistics operations. These ecosystems will be enriched and PLANET tools will contribute to regional PI hubs infrastructure planning and further logistics operation enhancement in the view of the 2030 time horizon. Furthermore, the EGTN aspires to be a network with **increased resilience** compared to the TEN-T. It will be a network set up to ensure seamless logistics operations and the smoothness of freight flows under situations that would cause significant problems today. More specifically, the EGTN will be able to:

development of collaborative logistics as a backbone of the PI concept implementation. The PI concept not only makes use of (smaller) standardized load units (pi-containers), but also builds on the availability of open and integrated networks that connect freight transport origins and destinations. In this context, the PI is based on the physical and digital collaboration between different actors in the supply chain along the corridors, through sharing information and resources such as transport capacities or storage areas. EGTN will be an **optimisation ready network** that will have the public and private infrastructure (hard and soft) available together with the willingness of stakeholders to share infrastructure and data (shared capacity models and collaborative logistics) in order to gain benefits in terms of process optimisation and the establishment of intelligent and efficient hubs. However, EGTN has a realistic approach toward the PI concept implementation, acknowledging that it is not feasible to implement the PI concept to the entire network by 2030. For this reason, EGTN will be a network that has **prioritised corridors and nodes for PI development**. Based on current and forecasted flows, it will define a subnetwork of corridors and nodes that will benefit the most from the PI in order to establish policies and to provide incentives for the development of PI infrastructure and services.

Finally, the successful implementation of the PI concept requires also close cooperation/coordination between the public and private sector actors on infrastructure investments and the network development. For this reason, the EGTN will have a **multi-level governance system** that will include all relevant stakeholders to the decision making, bridging business/industry needs to the EU policy/investments and reaching consensus among stakeholders for the development of EGTN. This governance structure aims also facilitate the EU strategy on economic development through the **EGTN orientation towards the achievement of EU import/export trade balance with China**. The current network configuration is mainly focused on efficiently handling import flows from China, especially with regard to the port system. The EGTN governance structure will take into account the industry requirement for facilitating also export flows and thus support EU strategy for trade balance with China. The first release of the EGTN profile including the ways of achievement are summarised in the following table.

P lã ACP 1 Qpn pac e l rkb&ã

▪ <u>Responsive to changes</u> [resp. attribute: Geo-economic awareness]	
	➤
	How?
➔	Physical layer technological layer governance layer
▪ <u>Optimisation ready</u> [resp. attributes: Innovation, Impact]	
	➤
	How?
➔	Technological layer Governance layer

▪ Resilient [resp. attributes: Impact, Inclusive]	
	➤
	<u>How?</u>
	➔ Physical layer technological layer Governance layer
▪ Oriented towards facilitating EU exports [resp. attributes: Geo-economic awareness, Integrated]	
	➤
	<u>How?</u>
	➔ Physical layer technological layer
▪ Supporting social cohesion & inclusiveness [resp. attribute: inclusive]	
	➤

	<u>How?</u>
	<p>→ Physical layer technological layer Governance layer</p>
<p>▪ <u>Bridge business/industry needs for planning to EU policy and infrastructure planning [resp. attributes: Impact, Innovation]</u></p>	
	<p>➤</p>
	<u>How?</u>
	<p>→ technological layer</p> <p>governance layer</p>

The EGTN is composed by two integrated components. These are:

1. The **EGTN [Integrated Smart Green EU-Global T&L Network] Dynamic Reference Modelling Framework** and associated 2030 and 2050 EGTN Target Models based on a EGTN roadmap and detailed KPIs for the 2030 and 2050 transitions.
2. An **EGTN Data Space** and simulation and AI tools [**Symbiotic Digital Clone**] supporting:
 - a. refinements for the Reference/ Target Models
 - b. design and investment decisions in development of EGTN network nodes
 - c. EGTN Operational Optimisation.

The EGTN Dynamic Reference Modelling Framework supports the interdisciplinary representation of an evolving EU-Global T&L Network driven by geo-economics and emerging technologies and concepts enabling progress towards a smart and green transport network. It facilitates the specification of Target Models based on an EGTN roadmap and detailed KPIs for the 2030 and 2050 transitions. The framework assumes the use of existing modelling and simulation tools to determine the characteristics/status of an existing network and to investigate the impact of geopolitical

developments (e.g., future New Silk Road and emerging trade routes) and impact of adopting innovative technologies and concepts (e.g., autonomous vehicles, warehousing automation, hyperloop, ICT, PI).

The EGTN Data Space and simulation and AI tools Symbiotic Digital Clone [SDC] enables:

- a. refinements for the Reference/ Framework and Target Models
- b. investment decisions in development of EGTN Nodes
- c. Operational optimisation of network performance

SDC will provide a virtual representation of EU-Global T&L Network or sub-Network utilising the EGTN models and providing data driven simulation and AI based decision support to stakeholder groups involved in a, b, c above. For this an EGTN Dataspace is constructed supporting an ecosystem of actors that interact through the sharing of data in assessing the status of EGTN and contributing to its developments.

The physical layer specifications aim to provide a comprehensive answer to the question: How should the EGTN be structured in terms of physical corridors and nodes? The objective is to have a network that is better adapted to the new EU & Global geo-economic conditions, serve more efficiently future freight flows and facilitate better the development of disadvantaged regions in comparison to the current TEN-T structure. In this context, the infrastructural layer of **EGTN is defined as the TEN-T of the future in terms of T&L infrastructure** consisting of revised and enriched existing rail/road/maritime TEN-T infrastructure (nodes & corridors). These required network changes are mainly the result of:

- **the new emerging global trade routes (Eurasian rail land bridge, Arctic route, International North-South corridor) and the connection and operational integration of TEN-T corridors to these global corridors**
- **the identified trend for regionalization of production in the project's Position Papers**
- **the expected/foreseen implementation of innovative technologies on Transport & Logistics operations**
- **the enhancement of the regional dimension of infrastructure
need for network resilience**
- **the potential impact of climate change on the EU and global transportation networks.**

In order for EGTN to take into account all the parameters described above into its infrastructure planning and design, PLANET is developing a strategic modelling capability to forecast future freight flows for years 2030 and 2050 which will lead to defining the final form of the physical network needed to be able to efficiently serve these flows.

More specifically, the strategic modelling capability of the project will assess together:

- _____

- _____

- _____

The new hierarchy and significance of entry points, nodes and corridors of the EGTN that will result from the strategic simulation process will be continuously monitored and assessed through the technological infrastructure of the EGTN since may dynamically change through time. In this sense, EGTN will be an intelligent network regarding its infrastructure development, being continuously aware of the geo-economic developments on EU & Global level and of the technological advancements.

The planning and design process of the physical layer of the EGTN as described above requires a strong technological support which will be provided by the Cloud-based Open EGTN infrastructure developed as part of the EGTN technological layer. More details on the functions and services required from the technological infrastructure of the EGTN will be provided on the relevant chapter of this document.

lishing a sound and fundamental understanding of the impact on the TEN-T network of global transport and geo-economic trends. In order to achieve this, Task 1.2 performs a strategic analysis of the most relevant emerging trade routes which are expected to gradually change global transport patterns, and a simulation of their potential impacts on the TEN-T. This relates to the intercontinental rail freight connections between China, Russia and Europe (Belt and Road Initiative), the maritime connection between China, Russia and Europe through the Arctic (Arctic route) and the connection between Middle East and Northeast Europe (International North-South Corridor).

The findings of Task 1.2 are published in two deliverables: D1.4 (available at the time of writing of the present document) and D1.5. The initial report establishes the baseline scenario (year 2019) for the three new trade routes considered for the EGTN network. The second report will explore the 2030 and 2050 simulations and link the usage of the corridors to changes in the disadvantaged regions (e.g. accessibility, economic growth, population).

o

With respect to flows reaching Europe through the aforementioned trade routes, regarding the Eurasian rail freight transport, rail services coming from China and arriving at the European border in 2019 overwhelmingly used _____ as principle entry point (PEP). The 200.000 TEU per year coming from China translated into some 55 trains per week. About 12% of this flow branched off towards Lodz. Some 23% went to Hamburg and some 44% went on to Duisburg. Smaller flows went to Liege, Ghent, Tilburg and Madrid. Export flows also travel in the opposite direction, but to a lesser extent.

For the International North-South Corridor, we see a current potential of over 86.000 TEU, which could increase to 125.000 TEU in 2030 and 206.000 TEU in 2050. It remains to be seen how long it will take for these volumes to be realised if the route is completed. Only a fraction of the cargo is related to Europe.

This concerns 8.500 TEU if the route would be opened right now, which could increase to 13.500 TEU in 2030 and 24.000 TEU in 2050. The corridor is therefore most interesting as a European trade route if European trade can be combined on INSTC trains with Russian cargo.

Regarding the Arctic Route, we have found that its greatest potential lies in the transport of raw materials that come from this region, especially energy-related raw materials. In 2019, approximately 6 ships per week arrived in Europe from this region. Russia has plans to more than triple the amount of raw materials extracted by 2030. However, Russia also plans facilities to be able to process the raw materials on its own soil, so that transport to Europe will no longer be necessary. It is therefore not expected these commodity flows to increase, thus keeping the impact on the European TEN-T network negligible.

As set forth already, by far the most important railway corridor between Western Europe and China, now and in the foreseeable future, runs through Poland, Belarus, Russia and Kazakhstan. Trains typically carry up to 41 high-cube containers of 40 ft., making up for trains of approximately 565m. As a rule, the trains do not exceed the total number of 41 containers, of any type or size, due to Chinese government subsidy regulations in conjunction with infrastructure capacity in the EU. However, for the long haul through the Eurasian Economic Union (EAEU) countries – in effect Belarus, Russia and Kazakhstan where freight trains often exceed 1.000m, combining trains is common use.

Under normal circumstances, lead times from terminals in inland China to Duisburg stand at 15 to 16 days or slightly less, which would allow for a time saving of some 14 days compared to ocean for the overall transport. However, currently experienced delays are seen to increase lead times to 18 to 19 days or even more. These partially capacity-related issues are a driver towards considering and testing possibilities for using alternative stretches. In the next sections, this is examined in more detail.

Chinese border. The second route diverts at Minsk, transits Southern Russia and then crosses into Western Kazakhstan, from where it also proceeds to the Chinese border. Over two thirds of rail freight between China and Europe is forwarded via the Russia-Kazakhstan route, with only small portions via alternative routes.

Break of gauge takes place on the Polish-Belarusian border (/Brest or alternative EU-EAEU border crossings) and on the Kazakh-Chinese border (Dostyk/Alashankou; Khorgos) or, for the Trans-Siberian route, the Russo-Chinese (Zabaykalsk/Manzhouli) or Mongolian-Chinese border (Erenhot). Customs procedures also take place on these border crossings, with Russia, Belarus and Kazakhstan being members of the Eurasian Economic Union (EAEU) customs area and Mongolia being aligned to it.

The essential milestones (both westbound and eastbound) are thus:

-
-
-
-

Border procedures are generally very time-consuming. Also, the time needed for border procedures can deviate due to logistics processes of operators (choice of terminal, trucking operations between terminals, loading and unloading in addition to transshipment, storages, train composition) or incorrect documents. It therefore seems fair to conclude that infrastructure limitations coincide with suboptimal administrative procedures and organisation.

Poland intends to invest some 55 million euros in the facilities on the Polish side of the border over the coming years, aiming to increase capacity and enable the use of 750m trains and higher axle loads. Another 40 million of investment is depending on the construction of a third railway bridge (broad gauge only) and additional tracks across the border jointly with Belarus. Terminals on the Polish side are privately owned, whereas Belarusian facilities belong to Belarusian Railway. Ideally, infrastructure investments would be accompanied by optimisation of procedural management and communication between parties on both sides of the border, initiatives for which are being started as well. Options for improvement are being considered by multiple stakeholders, but, as we will see, partially depend on customs regulations. One possible option could be a limitation of loading and unloading operations at the border terminals, in order to focus on essential border handling (transshipment and legal procedures). Also, optimising shunting procedures of empty wagons in the border area is considered.


Obviously, another option might be bypassing /Brest altogether, possibilities for which are being examined by a number of market parties. One such possible option would run from Poland through Lithuania, entering the broad-

Infrastructure capacity on this route is relatively limited, however, thus rendering it unsuitable for large numbers of trains in the foreseeable future. Currently, the Polish and Belarus governments are also considering a second border crossing north of (Czeremcha/Vysokolitovsk) for border crossing. Another potential bypass transits Ukraine, possibly departing from Budapest or Bratislava and changing to broad gauge at Dobrá/Chop. Recently a plan was conceived by the Austrian, Slovak and Russian railways to construct a broad-

According to the plan, construction would start in 2024 with operational status to be reached in 2033. [2]

The strategic planning capability of the EGTN will consider future scenarios which combine the main uncertainties expected to impact future freight flows towards Europe and within TEN-T and the network. In the context of D1.1 (EGTN Foundational Position Papers and Simulation Scenarios) the four Foundational Position Papers defined the main uncertainties and formulated scenarios related to each covered field (Geo-economic developments, interconnection issues of railway transport corridors, transition towards PI). Following this process, two consolidated scenarios were drafted, combining plausible variations of all the identified uncertainties in the PPs. The detailed analysis of the parameters and the narratives of the consolidated scenarios can also be found in D1.1.

The structure which was used for drawing the consolidated EGTN scenarios (figure 3) includes the combination of variations of the main parameters that are expected to affect the future demand and supply for transportation, leading to the definition of the narrative of each scenario. The assessment of the results from the simulation of the two scenarios will be made through the implementation of proper Key Performance Indicators.

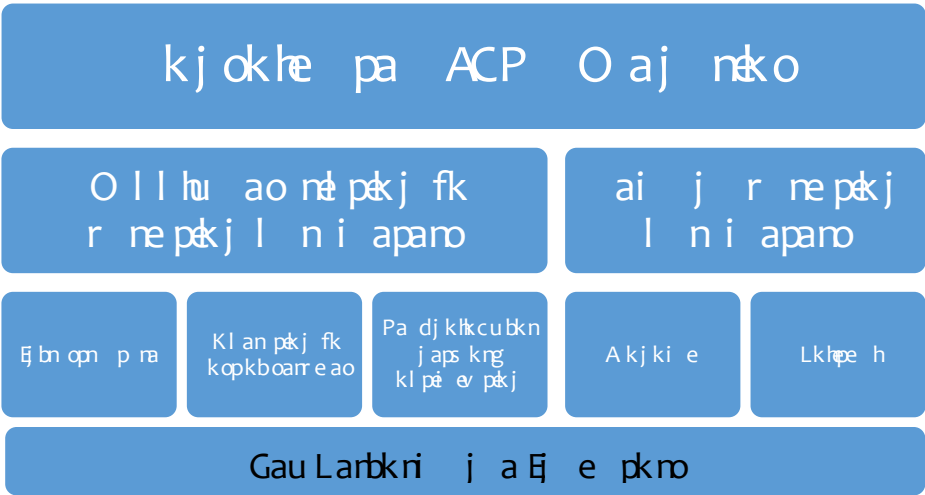

Bæ ra k j o k l e þ a o a j n e k o þ n þ r a

Definition of demand

The demand for freight transportation is expected to be mainly affected by parameters related to economic and political development. According to the uncertainties used in the PP scenarios these parameters include:

➤ Economic parameters:

-
-

➤ Political parameters:

-
-
-
-

Definition of Supply

The supply regarding freight transportation includes the available hard infrastructure, the services and the technological infrastructure for serving the flows but also the environmental parameters affecting capacity and decisions made regarding the use of the available infrastructure. According to the uncertainties used in the PP scenarios these parameters include:

-
-
-
-
-
-

Translating consolidated scenarios implications for strategic modelling

The implications of the two consolidated scenarios, need to be translated to specific input parameters in order to be able to be inserted into the strategic model. The following input parameters will be used to quantify the foreseen implications of the future scenarios:

- Average speeds of transport modes.
- Generalized transport cost of transport modes, including all types of costs (labour, capital, fuel costs, tariffs etc.), transport time etc.
-

In the following table (table 3), an initial approach to quantify the implications of the two consolidated scenarios on the transportation system is presented (for year 2030), by changing the values of the aforementioned parameters in relation to their value in the base year (2019).

P ða Pn j ch pãj kbo aj nãoé l ðe pãj opki k altã c l ni aparo

Parameter	Implications & relevant strategic model parameters	
	Consolidated Scenario 1	Consolidated Scenario 2
Infrastructure		
Barge Tariffs	Structural increase factor (because of reduced capacity).	No structural factor applied, remains equal.
Road tariffs	Structural increase factor because of increase of demand for road transportation (due to lost capacity of IWW).	Structural factor >1 per t.km (because of carbon pricing).
Rail tariffs	Structural increase factor because of increase of demand for road transportation (due to lost capacity of IWW).	Structural factor <1 per t.km (in order to make rail more competitive).
Modal split		
Continental divide ratio		

Transport Efficiency		
Transport Cost		

The main objective of the EGTN

concepts and enabling technological innovations in its operation, ultimately aiming to become a network operating under a PI paradigm. Towards achieving this goal, a Cloud-based Open EGTN infrastructure is being developed in the context of WP2 to support accordingly the main aspects of the EGTN concept, namely:

-
-

In the following paragraphs, the required functionalities for supporting each of the above aspects are described, leading to the definition of the EGTN technological requirements and specifications.

The successful planning of the Physical components (entry points, nodes, corridors) and structure of the EGTN requires awareness of the future freight flows. In order to acquire awareness, PLANET is developing a strategic TEN-T modelling capability which is described in chapter 4 and will be used to calculate the changes in flows at the macro level compared to a base year (2019) by integrating the emerging global corridors and simulating plausible future scenarios based on possible geo-economic, environmental, technological and other developments.

The strategic modelling and simulation capability which will allow EGTN to be aware of the geo-economic developments and other factors affecting flows and to timely respond to these changes, is part of the technological layer of the EGTN. However, the development and update of the model as well as the running of the simulation process whenever deemed necessary for providing new/updated information for the network planning, will be performed outside the cloud-based Open EGTN infrastructure and will not be included in its services.

Nevertheless, despite belonging in a parallel stream, the strategic TEN-T model will be connected to the Open EGTN infrastructure for two main reasons:

The implementation of the PI concept and the operation of the EGTN under a PI paradigm is the PLANET

sustainable activities. The latter aims to direct investments towards sustainable projects/activities in order to reach the targets for 2030 and reach the objectives of the European Green

Physical Internet potential efficiencies are achieved the forecasted 300% increase in transport demand could be achieved with only 50% increase in assets. The potential emissions reduction from a better use of resources through applying Physical-Internet concepts can help significantly towards achieving the goal of temperature reduction (Paris Agreement).

PLANET recognizes that the PI not only makes use of (smaller) standardized load units (pi-containers), but also builds on the availability of open and integrated networks that connect freight transport origins and destinations. However, the implementation of the PI concept simultaneously to the entire EU transportation network until 2030 is not realistic nor feasible in terms of the time and of resource allocation (cost, experts, etc.) In this context, in addition to facilitating the definition of the physical layer of the EGTN, the Open EGTN infrastructure will also define a subset of TEN-T corridors for prioritized development of Physical Internet concept (EGTN PI corridors). Along these corridors, the PI hard infrastructure will by priority be implemented and incentives and policy packages may apply for the development of the corresponding PI digital infrastructure & services (Multimodal & Synchronodal services) that are also part of the technological layer of EGTN. The selection/definition of the PI corridors (in order to guide companies & public investment) will be based on strategic PI scenarios creation and validation based on aggregated parameters resulting from Synchronomodality, OR based Modelling and PI simulation. These strategic PI corridors will be dynamically updated.

Finally, the planning of the infrastructure development of the EGTN as being also part of the EGTN Governance process requires the wide participation of stakeholders and their support through the development of a Decision Support System (DSS). Multi-Actor Multi-Criteria Analysis (MAMCA) is a decision-making method to enable the simultaneous evaluation of alternative policy measures, scenarios, an early stage of the

decision-making process and during the whole decision-making process. It is extremely well suited to complex decision-making processes such as those involved in mobility policies and the transport sector where many stakeholders from several areas and with different background are involved. It renders the decision-making processes more efficient and contributes strongly to critical debates by offering to approach these with a democratic dimension [10]. In this context, PLANET will develop a MAMCA DSS to consider the opinions of various stakeholders regarding public and private investment scenarios related to the development of EGTN and the corresponding economic impacts. Through this method, stakeholder groups will identify a specific set of criteria and allocate weights to each distinct criterion leading to decisions that are better informed and of wider acceptance. The PLANET DSS may be focused on different levels of stakeholder governance (regional ecosystem stakeholders, EGTN corridor stakeholders or at the whole EGTN level).

Crucial for the success of MAMCA method is the provision to all participating stakeholders of sufficient information in order to be able to assess the investment scenarios and reach unbiased decisions. This will be facilitated through establishing of a process for continuously monitoring EGTN infrastructure development and operations and calculate proper Indices and KPIs that will be provided to stakeholders in order to be aware of the operation and status of the network.

Summarising from the above, in order for the Open EGTN infrastructure to provide the functionalities described above, it will develop and integrate:

-

-
-
-
-
-

- a) the PLANET new global connectivity index of nodes and regions which was developed in the context of the Position Paper 1,
- b) operational efficiency indices and
- c) the PLANET Reliability index of corridors (considering the performance of the corridor at the level of infrastructure, trade, political, financial and cultural).

By technological innovation modelling, we refer to the abstract procedure that aims at providing a representation (a model) of the impact of novel and not-yet established technologies and concepts (i.e., innovations) on the EGTN. This capability meets the EGTN vision for efficiently undertaking the business operations view to public policy and planning process. In this section, we present a generalization of the first prototyped model developed as part of Task T1.4. The model developed there was built around a single case (inspired from LL1) and now we highlight the modelling process that led to that development.

The first step was the definition of a modelling use case, by following the template in Table 4. By **modelling use case** we refer to a specific situation in which a model could potentially be used. For our purposes, it provides main user (stakeholder interested in the analysis), context of application (logistic setting of interest) and evaluation scenarios of interest. Table 4 provides both the list of features and an explanation for each of them. It is important to note that the template provided defines both the modelling efforts and the project partners involved in the definition of the modelling use case and of a pipeline.

P ða o l k altj c ða ða pai l h pã


Feature Explanation

Modelling use case title:	A title for the modelling use case
Narrative presentation:	Explain what is are the problems being modelled and how this is being done.
PLANET partners involved:	List of partners name involved in the modelling use case

Model stakeholders:	List the main stakeholders considered in the model
Involved models (reference to D1.2):	List the models involved (as defined in D1.2 or additional ones)
Focal technologies and innovation:	List the technologies considered in the modelling use case
Modelling scenarios:	Describe the scenarios at a high-level


Once the first definition of the modelling use case is completed, it is then linked to a specific pipeline. By **pipeline**, we mean a sequence of models executed in sequence in such a way that the output of one will be the input of another. For our use here, a pipeline should substantiate a modelling use case. In other words, for each modelling use case, we devise a pipeline. A pipeline is written in a certain programming language. The definition of a pipeline follows the map given in Figure 4: Technological innovation modelling map

Starting from a simple instance, multiple scenarios (two in the case depicted) are formalized in such a way to be used by a combination of various models. The combination of the models is driven by the modelling use case, which defines the main goal of the modelling use case, but also by the specific capabilities of the models considered. Moreover, the combination of the models needs to be constructed in such a way to allow for a transfer of information from the microscopic and operational setting where a set of technologies is deployed to the macroscopic level of interest for the EGTN. The output of the evaluation of the models is then post-processed leading to two (or more) alternative parameter settings which then fit a macroscopic model. The combination of various models is the central and pivotal step of the whole technological innovation modelling as it requires a way to bridge the results (the output) of a microscopic model with the requirements (input) of a macroscopic model.

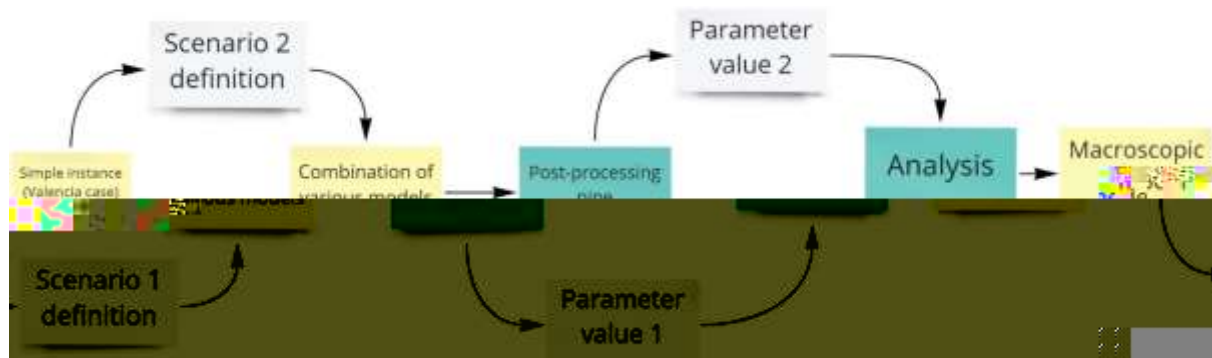

Bæ ma o Pa djklkce hë jkr pãj i k altë ci l

This combination is the main modelling contribution that can be extracted from the prototype model developed in T1.4. In order to evaluate the impact of innovative technologies at the EGTN level, i.e., at the macroscopic level, we found most effective a method that, first, models the impact of technology at the microscopic level and second,

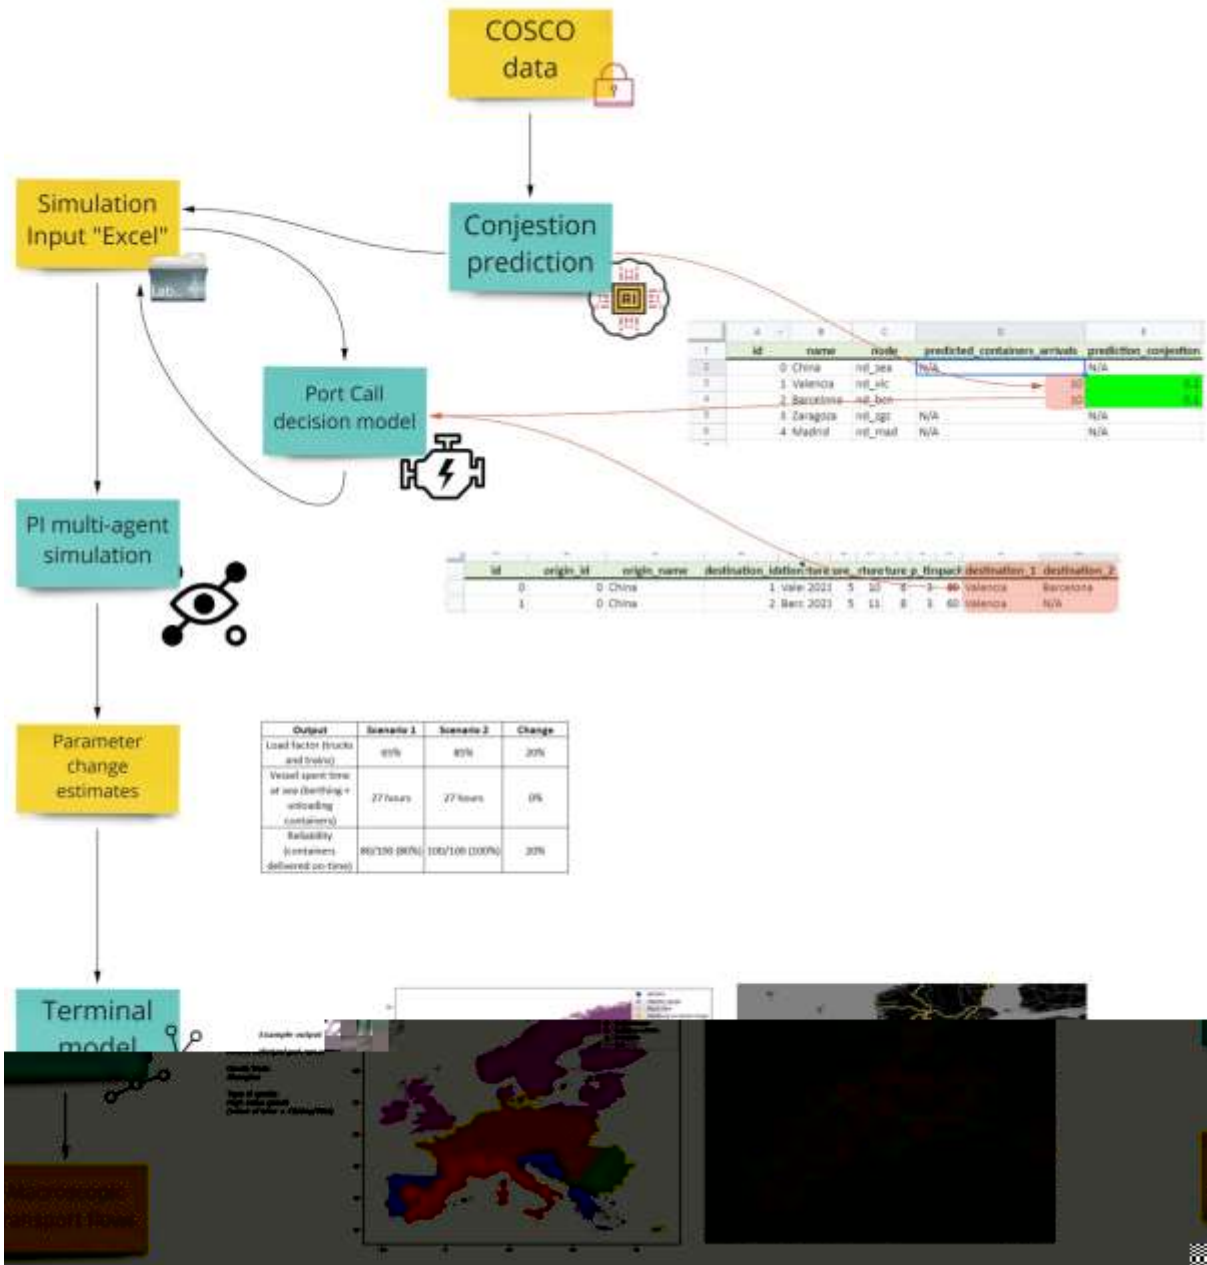

Be na 1 ne c e p dai erk i rki k al h e c c l at i l h b rki P o

estimates the aggregated impact for these parameters that are input to a macroscopic model. Figure 5 shows, by means of an example, the steps followed. This Figure shows three models (turquoise boxes) representing different technologies (Congestion Prediction, Port Call decision model and PI multi-agent simulation) whose output leads to the parameter changes estimate then input to the Terminal model (a macroscopic model leading to the plots on the left where port attractions are calculated at the EU-level). The parameter changes estimations were related to a selection of parameters input to the macroscopic model. The fact that we estimated changes and not the parameters required by the model is due to the fact that the microscopic models could not reproduce the baseline parameters of the macroscopic model. This constitutes the approach to close the gap between microscopic and macroscopic level.


1 0

The main objective of the long-term EGTN network design is to find the best nodes of a PI network based on the TEN-T corridors in order to guide the PI infrastructure and secure its development. PLANET will deliver as part of the EGTN 2030 & 2050 infrastructure the PI subnetwork of EGTN using strategic PI impact assessment models as part of the strategic modelling infrastructure. In addition, it is necessary to investigate the balance between costs and CO₂ emissions when designing such a PI network.

1 0


The project WP1 activities will focus on defining this PI priority corridors of EGTN. The methodology to be applied and embedded in the PLANET platform is described below.

The transport network may adopt different configurations. As a starting point there are some models as described in the ICONET project [11].

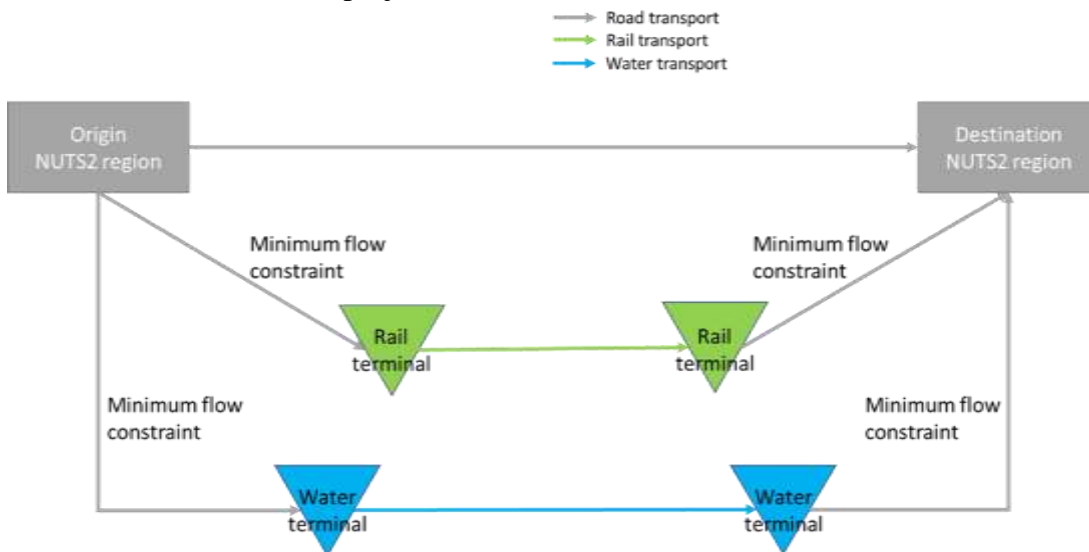

Bæ ra 2 apš kng i k ahopn p ra bkn pda PA P oä LEj apš kng [11]

As shown in Figure 6, TEUs are transported from one NUTS2 region to another and this can be done by road, rail or water, depending on the available infrastructure. To replicate the current situation in the TEN-T network, flow restrictions on road transport to and from rail and water terminals are set according to how many containers are currently transported by rail and water to and from each region. The resulting network flows for rail and water are shown in Figure 7.

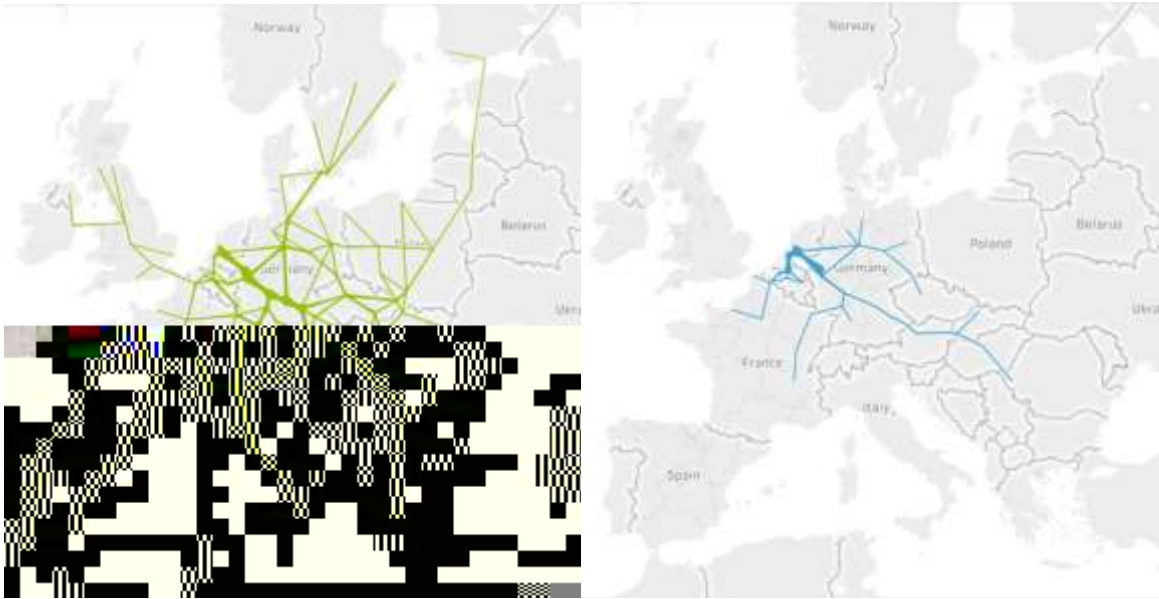

Bæ ra 3 N ð j s þanþri j d krpj apð kngokbpda LEj apð kng òa kj PA P [11]

In the case of rail and water terminals, we can define the role of a PI node in the network according to the type of flows passing through that node. If only flows to and from other terminals pass through the node, it is defined as a PI transit. If flows to and from the originating or destination NUTS2 regions pass through the node, it is defined as a PI gateway. This is shown in Figure 8 for rail terminals and water terminals, respectively.



Bæ ra 4 N ð s u j s þanþari ð þ [11]

The scope of a network is defined as the set of NUTS2 regions that are within a given distance from the nearest PI gateway. Containers are transported from rail or water terminals to NUTS2 regions. According to results published in ICONET [11], to cover at least 90% of the containers transported by TEN-T, the network must incorporate some 110 terminals. To cover 95% of the containers transported, the network needs to incorporate about 10 more terminals. The remaining 5% will be too far away from a PI gateway to be realistically and cost-effectively covered by the PI.

Within the network, goods may reach their destination by various routes depending on how overloaded the network is, which may seek different alternatives and thus avoid delivery delays or congestion at network connections. The transportation of goods is modelled by links that represent transport infrastructure and services. However, to account for multimodal transport, different levels of network representation detail require to be considered. In the context of examining PI hubs [12], whose role in the PI network goes beyond transshipment and short-term storage functionality to include the complex interactions between the multiple terminals and services operating in close proximity, it is required that the network representation of the model considers:

-
-
-
-

Therefore, two different aggregation levels are used as a more detailed representation of the PI Hub assets is required. Within the PI Hub, specific terminals, routes, and bottlenecks are considered as illustrated in Figure 9. Such detail is critical for the representation of routing decisions within the Hub, while for the external locations.

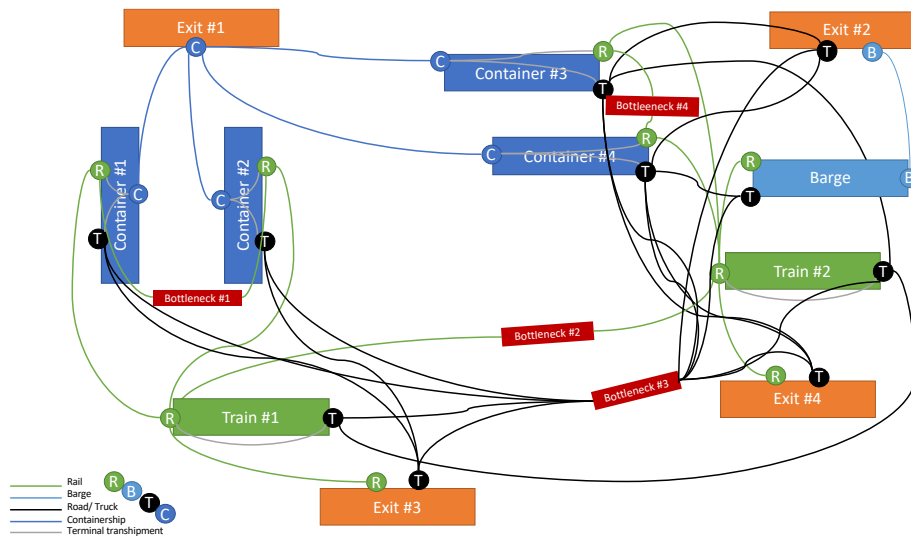


Figure 9: PI Hub network representation [12]

The PI Hub network representation is composed of terminal nodes with transshipment capability between various modes. Rail and barge terminals are also considered for transshipments to rail wagons and to river barges respectively. For each of the terminals, the modal shift services offered are associated to performance properties that can impact the routing decision in terms of travel time and cost. Each of the PI Hub links, is associated to specific distance, travel time, cost and capacity. The capacity feature is also

transshipment capability of the PI Hub terminals. Transshipments are also associated to cost and duration. The queuing that occurs for transshipment operations is therefore reflected in a dynamic way. PI Hub entry and exit locations are captured through fictional nodes, that facilitate the boundary between the disaggregate representation of a PI Hub and the aggregate representation of the PI H

For the aggregate hinterland representation, the TEN-T PI hubs are represented as nodes, with short-term storage and transshipment for each connection between two PI hubs, the great circle distance, the road distance and travel time are obtained by using the Google Maps API. For calculating the distances of the rail and inland waterways network, the GIS information were used.² For calculating the sea distances, an online tool³ was used. For the calculation of travel times, river and sea services were assumed to operate at 7 and 15 knots respectively. Traffic congestion as provided by Google Maps API at a morning peak hour was measured in minutes.

By adopting this detailed disaggregate representation of PI Hubs enhanced visibility in operations status within the hub is achieved, which can drive a significant increase in operational efficiency. By recording information on queues and travel times for transshipments at different terminals of the PI Hub, more efficient and less congested hubs are promoted. This enables routing cargo by considering both the hinterland transport and the transshipment legs cost components. Depending on the status of each terminal, the travel time information is dynamically updated, enabling logistics providers (and the PI Shipping Service) to continuously track and compare the performance of their route of choice, against other potentially more efficient routes. This dynamic approach provides fair criteria for all logistics providers, and mode operators, as it can encourage modal shift and deviations against disruptions considering both the level of terminal operations congestion and transport mode (including hinterland) efficiency criteria.

Despite analysing the performance of an established network, the above modelling approach can also be utilized from an infrastructure investment perspective. Transport investments are not only expected to introduce new physical links or nodes in the network, but instead to enhance the operational efficiency of the existing ones. Through the disaggregate representation of PI hubs, it is possible to represent the impact of technological improvements into the efficient operation of intra-terminal or transshipment (between two terminals of a hub) operations. Other technological advances might have an impact on capacity levels or consolidation rates, that can again be represented as an impact into the capacity feature of a specific link or node of the network.

In the context of the above, PLANET infrastructure for planning and operationalisation of EGTN will provide major capability and results for realisation PI network development and paradigm shift support. This is especially import since in order to reach a Europe-wide version of PI requires a massive change in the contemporary logistics industry. According to the ALICE roadmap [6], PI should be a reality by 2040-2050. Climate agreements within and between EU Member States will play a key role. When transport becomes more expensive due to emission charges there will be a greater incentive for suppliers and users to make transport more efficient, which can be a strong driver for the PI network.

The PI-based transport model transforms the fragmented industries of freight transport, logistics and distribution into a hyper-connected logistics-based industry. The article [2] indicates that when applied to urban environments, PI enables the emergence of Hyperconnected City Logistics (HCL), a rich conceptual framework for designing much more efficient and sustainable urban logistics and transport systems.

The Open EGTN infrastructure will provide tools and services that will support stakeholder for operational decision making and will improve procedures towards achieving the “**operational excellence**” attribute of EGTN in the context of implementing the PI concept. EGTN will be an **optimisation ready network** in order to be able to respond to the operational needs of the industry. In this context, the public and private infrastructure (hard and soft) will be available together with the

willingness of stakeholders to share infrastructure and data (shared capacity models and collaborative logistics) in order to gain benefits in terms of process optimisation and the establishment of intelligent and efficient hubs.

For EGTN to operate under the principals described in the previous paragraph it requires the technological developments to enable a gradual improvement of the current intermodal freight network. More specifically, the main identified prerequisites include the following:

- **promote standardisation and collaboration between companies**
Standards such as GS1 help to create interoperable communication protocols between different companies
- **Information exchange platforms**
the concept of a federated network of platforms
Digitalisation of Transport and Logistics Forum (DTLF)
platforms such as Fiware, IDSA (International Data Spaces Association) and initiatives such as GAIA-x facilitates the exchange of data between the different companies on the continent
- **Blockchain technology**
- **Sensors and IoT devices help to capture the position and status information of the cargo in real time**
efficient exception management, contingency planning and monitoring services can be developed
- **key service is the routing service**
apply optimisation criteria
handling and transport assets

Based on these prerequisites, the Open EGTN infrastructure will develop and integrate:

-
-

-
-
-
-
-

models

routing decision support models

transport gravity

1 1

Routing decisions in logistics vary considerably with the context of application. PLANET's Living Labs offer wide applicability in that sense with routing decisions ranging from intercontinental to urban. The use cases that arise from the Living Labs, offer an excellent opportunity to understand the operational requirements for addressing and operationalizing them in an EGTN context. Multiple use cases are examined, one focusing on long-haul intercontinental sea routes while the another one on challenges associated to urban distribution. Despite similar incentives for operational efficiency, cost reduction and environmental sustainability, the context of each decision is different, and produces unique industrial requirements.

5.5.1.1 *Urban distribution*

A challenge proposed by Living Lab 1 partner, CITYlogin, was that of dynamically redesigning urban delivery rounds, to alleviate delivery delays. This challenge is highly relevant to the concept of EGTN as it utilises the benefits associated to dynamic tracking of parcel deliveries and vehicle fleet. The proposed operational problem focuses on delivery rounds that are typically fully designed prior to initiating their implementation every day (for CITYlogin this is 9am local time). The design of delivery rounds takes into account, the fleet (i.e. the number and capacity of delivery vehicles available) and local accessibility constraints such as Low Emissions Zones (LEZs) or Zero Emissions Zones. LEZs that are increasingly popular in European cities [13] as they are one of the most effective measures towns and cities can take to improve air pollution. Low emission zones reduce emissions of fine particles, nitrogen dioxide and (indirectly) ozone. LEZs are areas where the most polluting vehicles are regulated. In practice this means that vehicles with higher emissions cannot enter the area.

As delivery rounds commence, uncertainty in traffic conditions, limited parking availability, handover conditions uncertainty and the lack of accurate information may incur significant delays. It is often the case that the original planning and design of the rounds requires to be updated. This is because delivery operational constraints, such as delivery time windows and driver shift hours, are not met anymore and at the same time they cannot be violated. In such cases, a fleet operator tries to identify delivery rounds that might finish early and dispatch them for helping the round running late. The process of identifying van availability, van suitability and then redesigning the delivery rounds, that involves identifying which parcels will be moved from the original van to the helping van, and where the two should meet for the parcel exchange will take place. This process, which is currently performed manually can be automated and integrated into the EGTN platform and operationalized to enable the identification of considerably more efficient solutions through improved consolidation.

information and dynamically updated routing statuses of cargo, offer a unique opportunity to integrate predictive capability into an EGTN platform, that will then enable the more efficient station staffing of warehouses by its operators.

The EGTN governance goal is to ensure that the EGTN members engage in collective and mutually supportive action, that conflict is addressed and that network resources are used efficiently and effectively. EGTN governance refers to the PI network and not of the TEN-T, the current governance scheme of which is presented below and will continue to exist in parallel and interface with the EGTN governance model whenever possible and needed. The purpose of the present chapter is to define the specifications of the EGTN governing scheme in order to achieve the aforementioned goals, building on the work undertaken in the PI roadmap of ALICE and defining the prerequisites at governance level for the realization of the EGTN vision as a network operating under the PI paradigm.

The governance of a transport network can be considered as a loop including the following stages: The planning of its development, establishing the required rules and procedures (regulating) for all its aspects, facilitating the implementation of plans and finally monitoring of the development progress and level of achievement of its objectives in order to adapt/correct initial plans (re-planning). In this context, the proposed governing scheme for the EGTN should be able to support all the above-mentioned stages of network governance. Starting from the planning and re-planning process, it should be able to include all relevant stakeholders in the decision-making using the proper tools and processes and to ensure that they have the required access to information to come to their decisions. With regard to the establishing of rules and procedures for the development and operation of the EGTN, priority should be given to policy and legislative initiatives which will support PI in terms of technology implementation and infrastructure development (e.g. rail interoperability, green investments). Facilitating the EGTN realization will require a competent governing entity at each level (e.g. regional level) which will ensure that collaborative logistics and the shared capacity model which are the backbone of PI can be achieved, by bringing onboard all relevant stakeholders. Finally, a framework for collecting and sharing data (KPIs etc.) related to the development and the efficiency of EGTN should be established to support decision making. All the above-mentioned functions of the EGTN governance are closely connected to and will have the strong support from the functions provided by the PLANET technological solutions which will be part of the technological layer of the EGTN.

2

The Trans-European Transportation Network (TEN-T) is a recent multimodal transport initiative, having a clear corridor approach and focusing particularly on the most strategic parts, i.e. the Core Network Corridors (CNC). For implementing the CNC, a governance structure is established, including a **European coordinator**, a **secretariat** supporting the coordinator and a **corridor forum** for each corridor. As described in the regulation documents, the coordinator has an important role in facilitating the CNCs implementation by ensuring that a work plan is established and by identifying appropriate measures, foremost the infrastructure investments in the corridor. The work plan is approved by the **concerned states** assigned to each CNC. Corridor forums are a new tool aiming to bring key stakeholders for each corridor respectively together for consultative purposes and in addition working groups can be connected to the Corridor forums.

The Corridor forum has according to the regulation a consultative role and is set up in agreement with the concerned states. The composition of representatives in the Corridor forum can be agreed between concerned states and the European coordinator, and can comprise stakeholders including local and regional authorities or operators. In addition, working groups on specified topics can be arranged. Coordinators have also been used in developing the TEN-T priority projects preceding the corridor approach, achieving good results.

The corridor approach has been a part of the earlier deployed initiative of Rail freight corridors. Since these rail corridors to a large extent overlap with the Core network corridors, adequate coordination between the initiatives is considered to be important and representation from the Rail freight corridors is expected in the Corridor forums.

The corridor approach aims to bring all concerned stakeholders together and enhance a coordinated infrastructure planning and thereby strengthen the connection between infrastructure planning in different levels of society. [3]

P l a 1 m a j p P A P c k r a n j j a q n p r a

Governance structure components Role

<i>European Coordinator:</i>	Facilitate the implementation
	Ensure that a workplan is established
	Identify appropriate measures (e.g. infrastructure investments in the corridor)
<i>Secretariat:</i>	Provide support to the Coordinator
<i>Corridor forums:</i>	Bring the stakeholders together for consultative purposes
	Exchange of information and multi-level interaction between stakeholders
	Reach common overarching objectives
<i>Concerned states:</i>	Approve the workplan
<i>Additional working groups (on specific topics):</i>	Several actors with similar interests can come together and form one voice

2

Governance can be defined as the development and implementation by public governments, the private sector and civil society, in their respective roles, of shared principles, norms, rules, decision-making procedures and programmes to shape developments and their use.


Governance of the Physical Internet is like governance of the digital internet. Digital Internet governance is defined as "the development and implementation by governments, the private sector and civil society, in their respective roles, of shared principles, norms, rules, decision-making procedures and programmes that shape the evolution and use of the Internet" [4]. The digital Internet consists of thousands of interconnected networks run by service providers, individual companies, universities, governments, and others. The Digital Internet is a complex communications system that connects billions of devices around the world and allows each device to communicate with every other device using a common protocol. Internet users can be governmental, commercial, or private entities.

Internet services are operated by several Internet Service Providers (ISPs), which ensure a smooth flow of all kinds of digital information. These providers assign a unique number to each device called IP and it will be unique throughout the network.

The Internet is decentralised,

2

In projects such as Sense [6] and ALICE work groups, various levels of governance have been proposed depending on how the physical internet will be implemented over the next few years, as shown in Figure 8.

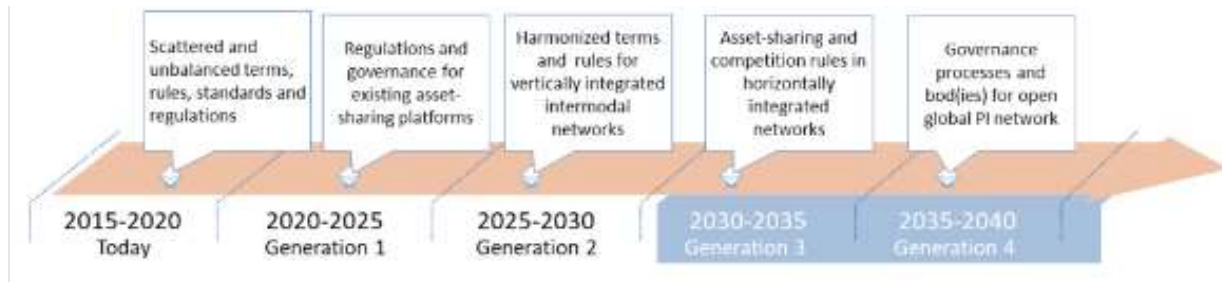

Bæ ra Haraldskbl duoe hē panj apckr arj j a [6]

The main characteristics of each of these levels are described below from the simplest current levels to the most advanced levels.

Level 0

At the grassroots level, the governance of supply network collaboration and coordination is currently a scattered and unbalanced set of terms, rules, norms and regulations. There is no governance framework that facilitates and supports horizontal collaboration and vertical coordination between different supply networks. Governance of horizontal collaboration has mostly been based on individual cooperation agreements between individual shippers, designed on an ad hoc basis and studied by law firms and consulting teams.

A list of different examples of existing collaborative transport and how they are operated:

- **Pallet networks.**
- **Clustered networks.**
- **Open warehouse networks.**

Level 1

It is a first step towards a shared governance framework for Physical Internet networks, which will emerge from existing asset sharing platforms under development. These first steps will be explored and used to constitute the first concrete example of common terms of reference for sharing logistics assets and services in different supply networks. They will be addressed through specific regulations at EU level. It will require mapping and analysis of existing asset sharing networks, their forms and business models and reaching consensus on basic rules for the treatment of individual platforms.

Level 2

It will focus on the vertical integration of different supply chains in physical Internet networks. This will require the establishment of a governance framework with harmonised conditions and rules for vertically integrated intermodal networks. This will require the ratification of the Rotterdam rules that will facilitate the adoption of collaborative management of intermodal transports and the definition of the next generation of Incoterms.

Level 3

The governance framework will be extended to support collaboration and asset sharing in horizontally integrated supply networks. In addition, the boundaries between vertically integrated supply chains will be removed as different agreements are made between key logistics players. This will allow asset sharing and opportunistic routing and re-planning of shipments across PI nodes belonging to different networks. Organisational models and rules for asset sharing in horizontal networks, defining a governance framework and defining the business model for the flow of PI data will be necessary.

Level 4

At this last level the governance framework will already be fully defined and implemented, including everything necessary for a free and global physical Internet network. The governance framework for Generation 4 PI will cover all relevant business and regulatory aspects that need to be addressed in order to make the nodes and services of the PI network available to the community. Governance processes will be needed for the different layers/areas comprising both centralised and federated governance models and apply standards to leave the network open, involving high-level public bodies following the example of 4G and 5G.

2

In terms of the governance of the EGTN network, it could be said that it is an adaptation of PI governance applied to the different corridors. Two approaches can be envisaged for the origin of the construction:

- **Bottom Up:**

- **Top down:**

The bottom-up strategy would be the one on which the above-mentioned tiers would be based and would be the only viable strategy for a more progressive growth of the network.

An acceptable estimate for the EGTN network would be to reach the PI governance level 3 mentioned above, as this would be the first of the levels at which the physical Internet network as such is developed. To reach this level would require [6]:

-
-

-

-

- **The sustainable finance policy:**

In this first version of the deliverable, an initial attempt is made to define the characteristics of EGTN based on the work undertaken in WP1 tasks leading to the first set of specifications for the network, broken down to each of the three identified constituting layers. It is an effort towards the establishment of a green, intelligent, resilient and inclusive network which on the one hand will be significantly more efficient compared to the existing TEN-T (environment, cost, speed) while on the other hand it will have the safeguards to secure its operations under constantly changing global conditions mainly in terms of the geo-economic developments, climate change and international politics.

With respect to the physical layer of the EGTN, the initial results from the assessment of the impact of the three new trade routes on the TEN-T network is that the intercontinental rail freight connections between China, Russia and Europe (belonging to the Belt and Road Initiative) and more specifically the
appears to be the most mature route and the only one that will be of significant importance in the near future. The main entry point to the EU
most important start and end point for trains to and from China is the inland port of Duisburg. As for the main identified bottlenecks that hinder and

one mainly due to time-consuming custom procedures, followed by the congestion phenomena of the European rail network. The International North-South trade corridor (INSTC) has the potential for serving significant cargo loads but its implementation time horizon is uncertain and also it will be more interesting as a European trade route if European trade can be combined on INSTC trains with Russian cargo. Finally, the freight flows through the Arctic route are not expected to increase significantly, thus keeping the impact on the European TEN-T network negligible.

Regarding the governance model of the EGTN, it appears that a bottom-up approach is the only viable strategy for a more progressive growth of the PI network. According to this approach, different stakeholders will agree among themselves to develop parts of the PI while a central body will be needed to establish common standards for the PI in order to bring these parts together. Moreover, the governance framework will need to support collaboration and asset sharing in horizontally integrated supply networks and also the removal of boundaries between vertically integrated supply chains to allow asset sharing and opportunistic routing and re-planning of shipments across PI nodes belonging to different networks. Legislative and policy initiatives are also required to support the development of the EGTN, including mainly initiatives towards the achievement of interoperability, the greening of investments and the digitalisation of transportation.

The technological layer of the EGTN will be the backbone of the network, supporting and connecting all of its aspects, namely the planning of its development, its governance and operationalisation, through the implementation of innovative technologies and logistics concepts. This will be achieved through the development of a cloud-based Open digital infrastructure that will include tools and models but also through a strategic modelling capability that will be developed outside of it.

In addition to the above, one general conclusion that is inferred from this document is that in order for the EGTN to be able to acquire the desired attributes, the three layers must be developed as a whole and in alignment to each other since the EGTN is intended to provide solutions to complex problems. For example, a possible part of the solution to the request for network resilience includes the development of clusters of nodes e.g. in the land entry points to the European network, which will help distribute the risk regarding the continuity of operations and deal with fluctuations of freight flows that can cause capacity problems. However, this physical layer characteristic of the network, while critical, is not sufficient by itself. It needs to be supported by the technological layer which will provide the proper digital infrastructure (e.g. regional logistics platforms) to facilitate the operation of the cluster and the development of collaborative logistics and shared capacity models. Moreover, the governance layer will need to provide the proper structure in order to bring all relevant stakeholders together and jointly reach

decisions, collaborate and develop joint business models while at the same time it will monitor the results of the implemented solution and plan changes deemed necessary. In this simplified case, each EGTN layer has a special role to play but they need to be combined together in order to achieve the objective of resilience and this is something that needs to be considered in their development.

- [1] Belintertrans presentation - BREST: EAST-WESTERN GATE A transport and logistics HUB for goods from and to CHINA. Retrieved from: www.belint.de/material/belintpresentation.pdf
- [2] Austria backs broad-gauge extension to Vienna. International Railway Journal (2018, February 22). Retrieved from: <https://www.railjournal.com/freight/austria-backs-broad-gauge-extension-to-vienna/>
- [3] Öberg, M., Nilsson, L. K., Johansson, C., (2016). Governance of Major Transport Corridors Involving Stakeholders, Transportation Research Procedia, Volume 14, pp. 860-868
- [4] (2005). Tunis Agenda for the Information Society, World Summit on the Information Society
- [5] Dong, C., Franklin, R. (2021). From the digital internet to the physical internet: A conceptual framework with a stylized network model, Journal of Business Logistics, Volume 42, pp. 1-12
- [6] (2019). SENSE project D2.1 Roadmap to the Physical Internet
- [7] Palletways company website. Url: <https://www.palletways.com/>
- [8] Cargoline company website. Url: <https://www.cargoline.de/>
- [9] Flexe company website. Url: <https://www.flexe.com/>
- [10] Multi-Actor Multi-Criteria Analysis (MAMCA©) summary. Retrieved from: <https://civitas.eu/tool-inventory/multi-actor-multi-criteria-analysis-mamca-software>
- [11] Cruijssen, F., Zavitsas, K., Kouloumbis M., Cipres, D. (2020). D1.5 PI network optimization strategies and hub location problem modelling final, WP1 ICONET PI Framework (PI Business Models and Key Enablers), pp: 38-46
- [12] -
LL1- PI Hub-centric Network -
- [13] Low Emission Zone definition. Retrieved from: <https://urbanaccessregulations.eu/low-emission-zones-main/what-are-low-emission-zones>